

The Gokin logo is positioned in the top right corner. It features the word "Gokin" in a bold, white, sans-serif typeface. The background of the entire advertisement is a dark blue gradient with a radial pattern of fine, light blue lines and dots emanating from the center, creating a starburst or nebula effect.

Gokin

470-500W

Higher Generated Energy

Higher Reliability

 Lower BOS

Excellent Micro-crack Resistance

High Temperature Restriction

Partial Shading Optimisation

Extraordinary Aesthetic Design

• Operating Temperature

-40°C ~ +85°C

• Power Tolerance

0~+3%

• Junction Box

IP68

• NOCT

• Maximum Series Fuse Rating

25A

• Maximum System Voltage


1500V(IEC)

GBC

Black anodized aluminum

or Customized Length

Module Type														
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT

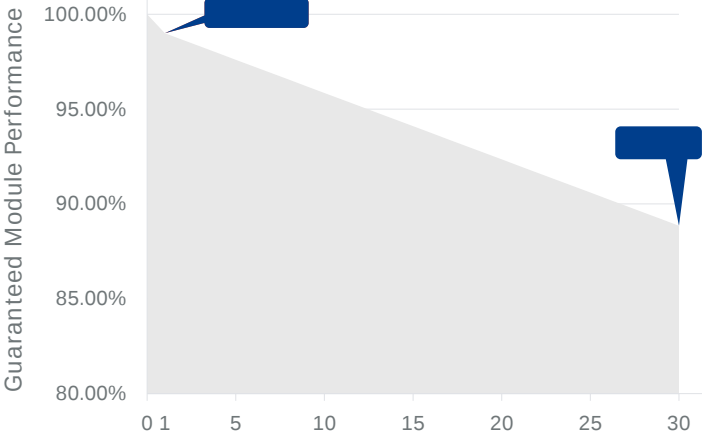

Front Side Maximum Static Loading

Rear Side Maximum Static Loading

HailStone Test