
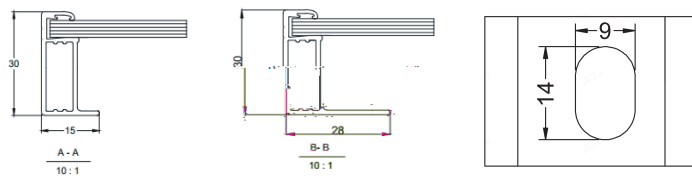


- **Operating Temperature** -40°C ~ +85°C
 - **T₉₈ max** 70°C
 - **Junction Box** IP68
 - **NOCT** 45±2°C
 - **Maximum Series Fuse Rating** 30A
 - **Maximum System Voltage** 1500V(IEC)


Mechanical Parameters

Cell Type	GBC
Glass	
Frame	Anodized aluminum
Output Cables	or Customized Length
Dimension	
Connector	
Packaging	
Protection Class	
Fire Rating	

Engineering Drawings

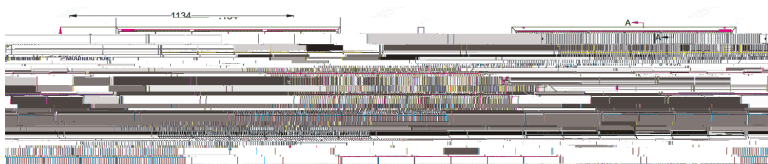


Electrical Characteristics (STC Test)

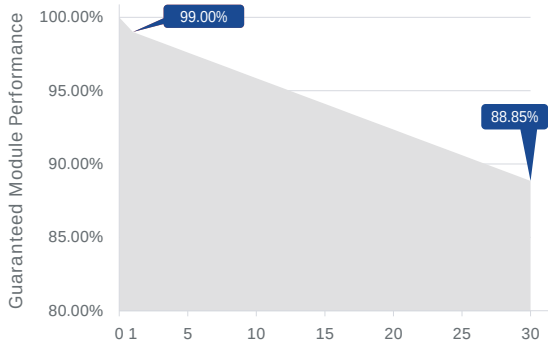[illegible]

Temperature Ratings (STC)

Mechanical Test Load

- | |
|-----------------------------------|
| Front Side Maximum Static Loading |
| Rear Side Maximum Static Loading |
| Hallstone Test |

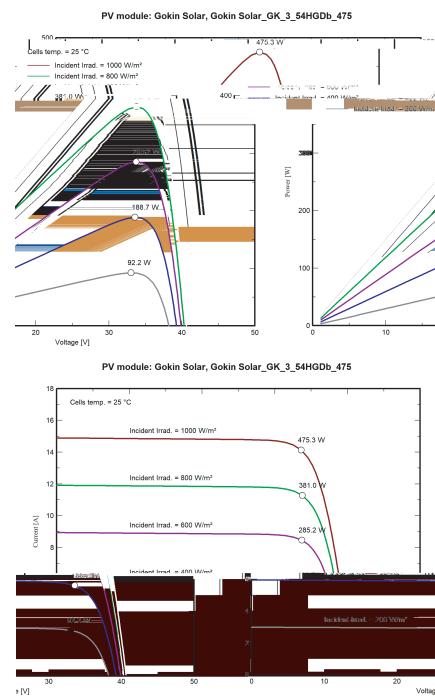

Cable type

Connector type